


TEMPORARY PROTECTION FOR FLOORS AND STAIRS


SELF-ADHESIVE, ANTISLIP, **BREATHABLE**, REUSABLE, WITH FIRE CERTIFICATION

- **PROTECTS** against STAINS and ABSORBS SHOCKS
- **BREATHABLE**: promotes steam and solvents evaporation
- Ideal for freshly laid floors such as vinyl and tiles
- **QUICK** and **EASY INSTALLATION** thanks to **SELF-ADHESIVE SIDE**
- **ANTISLIP**: very good adhesion on all surfaces
- **WATERPROOF** thanks to its plastic film
- **Not suitable** for heated floors, porous floors and faience tiles

Steam permeability
25 g/24h/m² ±10%
(according to the standard
ASTM E96)

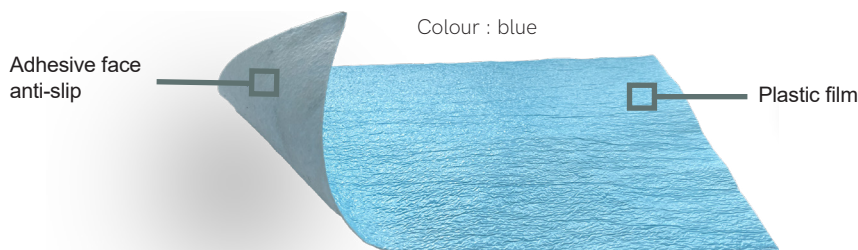

CONSTRUCTION: 3 LAYERS

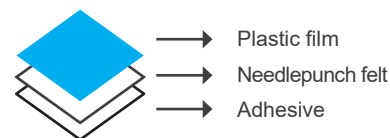

- SHOCK ABSORPTION**
- ANTI-SLIP**
- BREATHABLE MATERIAL**
- WATERPROOF**
- EASY TO CUT**
- FIRE PROOF**
(FIRE CERTIFICATE ON REQUEST)
- ECO-DESIGN: MANUFACTURED WITH RECYCLED FIBRES**



TECHNICAL DATA

Surface : flat needlepunch protective textile
Fibres : polyester & recycled polyester (>50%)
Backing: impregnated
Total weight: 180 g/m² ± 10%
Average thickness: 1,05 mm (ISO 9073-2)



* Information on emission of volatile substances in an interior, which represent a risk of inhalation on a scale starting from A+ (almost no emission) to C (high emission)

REFERENCES

Dimensions	Weight	m ²	Packaging	SOMMER Codes	EAN Codes
1 x 25 m	± 4 kg	25	36 rolls → 900 m ²	PECF2536	370037 9024092
1 x 50 m	± 8 kg	50	18 rolls → 900 m ²	PECF5018	370037 9024108

TEMPORARY PROTECTION FOR FLOORS AND STAIRS
SELF-ADHESIVE, ANTISLIP, **BREATHABLE**,
REUSABLE, WITH FIRE CERTIFICATION

PRECAUTION FOR USE

- Do not expose to the sun
- Do not combine solvents with the use of Cover Air Blue
- Do not exert permanent pressure of more than 100kg/m² for more than 24 hours
- Use the Cover Air Blue within 6 months of receipt.
- Before installation, let your floor dry for at least 72 hours.
- Duration of installation: 1 month maximum.
- Test the suitability of the product in a less visible place beforehand.

In the rare event that glue deposits remain on the floor, the manufacturer cannot be held responsible
In this case, pass warm water with a little mild household detergent (black soap for example...) on the surface concerned.

INSTRUCTIONS

- Stop underfloor heating before using the Air Blue Cover
- Dust the surface to be protected
- 10°C < ambient temperature < 25°C
- Hygrometry < 60%