

STRONG WAY

SAFETY PATH FOR CONSTRUCTION SITES

■ PREMIUM VERSION : REINFORCED THICKNESS
UV RESISTANT - WITH FIRE CERTIFICATION




FIREPROOF
(Fire certificate on request)



UV RESISTANCE

Colour : 1512 Red

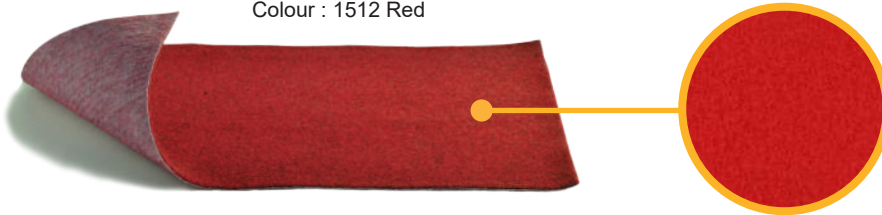

- MEETS THE “RED ROAD” OBLIGATION on CONSTRUCTION SITES
- EXCELLENT VISIBILITY: intense and long-lasting red
- EASY HANDLING and INSTALLATION



TECHNICAL DATA

Surface: velours needlepunched protective textile

Fibres: 100% polypropylene UV stabilized (1.5%)

Backing: flame retardant precoat

Total weight: 950 g/m² ± 10%



Loose laid on any
A2fl or A1fl
class substrate



EN 14041 : 2005
0334-CPR-201
Système 1
DOP35



* Information on emission of volatile substances in an interior, which represent a risk of inhalation on a scale starting from A+ (almost no emission) to C (high emission)

REFERENCES

Dimensions	Sommer Codes	EAN Codes
1 x 30 m	CHCCW1512C1	370037 9023309
2 x 30 m	CHCCW1512C2	370037 9020308



A Sommer Needlepunch brand

Sommer Needlepunch
341, rue de la Mairie
59780 Baisieux - France
www.sommernp.com

Tel : +33 (0)3 20 64 46 46
Fax : +33 (0)3 20 64 46 24
E-mail : commandes@sommernp.com

